F-Si CARBON

IL FUTURO DELL'XC

Una hardtail unica. Progettata per consentirvi di battere tutti in salita e sbaragliarli in discesa, questo razzo ultraleggero è il vostro biglietto per arrivare in cima al podio.

RICAPITOLANDO:

Costruita per l'odierno XC da cardiopalma, la F-Si Carbon è la hardtail XC più veloce mai realizzata.

PRINCIPALI ARGOMENTI DI VENDITA:

» L'AGILITÀ XC INCONTRA LA STABILITÀ ALL-MOUNTAIN
La geometria dello sterzo ***OutFront*** vi offre il meglio di due mondi: stabile e prevedibile su discese sfrenate, ma precisa e agile in qualunque altra situazione.

» TRAZIONE PAZZESCA - SENZA COMPROMESSI
La trasmissione con offset ***Ai*** inventata da noi offre foderi bassi super corti per una trazione eccellente in salita e una maneggevolezza agile, senza sacrificare spazio per i pneumatici e lo scarico del fango o limitarvi a una configurazione con un pacco corone singolo.

» RIGIDITÀ ESPLOSIVA
Basta con la flessione che spreca energia. La F-Si Carbon è rigida in tutti i posti giusti grazie a ruota posteriore Ai, foderi bassi super corti e struttura in carbonio ***BallisTec***.

» LA MIGLIORE FORCELLA XC... PUNTO.
Con la sua precisione di sterzo incredibilmente rigida e sicura, la ***Lefty*** sgomina i telai XC flessibili della concorrenza con una stabilità in curva e una maneggevolezza superiori. Il rake extra lungo custom rende possibile la nostra geometria dello sterzo ***OutFront***.

» DIAMETRI DELLE RUOTE IN FUNZIONE DELLE TAGLIE
Per ottenere la miglior posizione in sella possibile per tutti i rider, le taglie piccole sono state disegnate attorno a ruote da 27.5", mentre quelle dalla M alla XL attorno a ruote da 29".

PROFILO DEL CICLISTA

Atleti della coppa del mondo XC e chi aspira a raggiungere la gloria nelle gare XC.

TIPO DI UTILIZZO

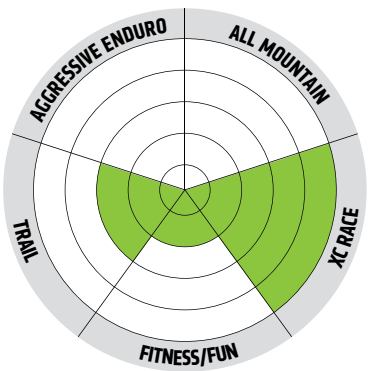

POSIZIONE DEL CICLISTA

XC moderno allo stato puro. Posteriore piatto ribassato con distribuzione centrale del peso.

TECNOLOGIA:

Costruzione In Carbonio ***BallisTec***

Ai - Trasmissione Offset Con Asymmetric Integration

Outfront - Geometria Dello Sterzo Ottimizzata

Si - System Integration

Micro-Sospensione Speed Save

Reggisella Ammortizzato Save 2

GEOMETRA

		XS (27.5")	S (27.5")	M (29")	L (29")	X(29")
A	SEAT TUBE LENGTH (CM/IN)	36.5/14.4	38.5/15.2	43.5/17.1	48.5/19.1	53.5/21.1
B	TOP TUBE HORIZONTAL (CM/IN)	54.7/21.5	57.0/22.4	59.6/23.5	62.2/24.5	64.9/25.5
C	TOP TUBE ACTUAL (CM/IN)	52.6/20.7	54.4/21.4	56.5/22.2	59.0/23.2	61.7/24.3
D	HEAD TUBE ANGLE	68.9°	69.0°	69.7°	69.8°	69.9°
E	SEAT TUBE ANGLE EFFECTIVE	73.4°	73.3°	73.2°	73.1°	73.0°
E'	SEAT TUBE ANGLE ACTUAL	71.5°	71.4°	71.3°	71.2°	71.1°
F	STANDOVER (CM/IN)	73.0/28.7	73.7/29.0	77.7/30.6	80.6/31.7	83.7/32.9
G	HEAD TUBE LENGTH (CM/IN)	9.7/3.8	9.7/3.8	9.7/3.8	11.0/4.3	12.2/4.8
H	WHEELBASE (CM/IN)	105.3/41.5	107.2/42.2	109.7/43.2	112.2/44.2	114.7/45.2
I	FRONT CENTER (CM/IN)	63.5/25.0	65.6/25.8	67.6/26.6	70.0/27.6	72.5/28.5
J	CHAIN STAY LENGTH (CM/IN)	42.2/16.6	42.5/16.7	42.9/16.9	★	★
K	BOTTOM BRACKET DROP (CM/IN)	4.5/1.8	4.5/1.8	6.2/2.4	★	★
L	BOTTOM BRACKET HEIGHT (CM/IN)	30.8/12.1	30.8/12.1	30.8/12.1	★	★
M	FORK RAKE (CM/IN)	5.0/2.0	5.0/2.0	5.5/2.2	★	★
N	TRAIL (CM/IN)	8.3/3.3	8.2/3.2	7.8/3.1	7.8/3.1	7.7/3.0
O	STACK (CM/IN)	57.0/22.4	56.9/22.4	60.3/23.7	61.5/24.2	62.8/24.7
P	REACH (CM/IN)	37.7/14.8	39.9/15.7	41.4/16.3	43.5/17.1	45.7/18.0

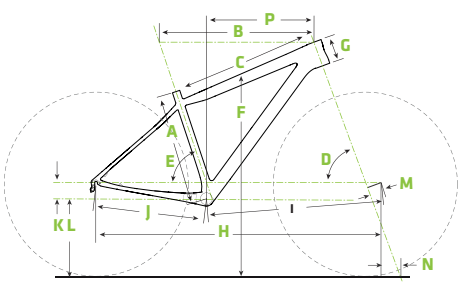

CATEGORIA
XC RACE

LAUFRAD-/REIFENGRÖSSE
27.5 / 29 x 2.25"
(XS, S) / (M, L, X)

CORSA
100mm *ANTERIORE*

C25107M

F-Si Black Inc.

FRAME	F-Si Asymmetric, BallisTec Hi-MOD Carbon, SPEED SAVE, PF30A, 1.5 Si Head Tube, 27.5" (S), 29" (M-X)
FORK	Lefty 2.0 Carbon, 100mm, XLR Isolated Damper Technology with XC+ tune and XLoc remote, Offset - 50mm (S), 55mm (M-X)
REAR SHOCK	N/A
RIMS	ENVE Carbon M50, tubeless ready
HUBS	Lefty 60 front, Chris King rear, 28 hole (Ai Offset dish - Rear)
SPOKES	DT Swiss AeroLite (Ai Offset dish - Rear)
TIRES	Schwalbe Racing Ralph EVO Snakeskin, 29/27.5x2.2.5", folding, tubeless ready
PEDALS	N/A
CRANK	Cannondale HollowGram SiSL2, Ai, BB30, 36/26
CRANK OPTION	N/A
BOTTOM BRACKET	Cannondale Alloy PressFit30
CHAIN	Shimano HG901, 11-speed
REAR COGS	Shimano HG901, 11-speed

FRONT DERAILLEUR	Shimano XTR Di2, direct mount, 2x
REAR DERAILLEUR	Shimano XTR Di2, direct mount
SHIFTERS	Shimano XTR Di2, 11-speed
HANDLEBAR	ENVE Carbon Sweep, flat, 740mm
GRIPS	Cannondale Locking Grips
STEM	Cannondale C1, 6061 Alloy, 1.5", 31.8, -5 deg.
HEADSET	Cannondale HeadShok Si
BRAKES	Shimano XTR Race, 160/160mm, Ice Tech Rotors
BRAKE LEVERS	Shimano XTR Race, carbon lever
SADDLE	Prologo Zero 2 CPC Nack
SEATPOST	ENVE Carbon, Di2 compatible, 27.2x400mm
SIZES	S (27.5") M,L,XL (29")
COLOR 1	Jet Black w/ Chrome and Cashmere - Satin / Gloss - BLE
COLOR 2	N/A
EXTRAS	Di2 Charger, Di2 Seatpost battery, Tubeless Kit

C25137M

F-Si Carbon Team

FRAME	F-Si Asymmetric, BallisTec Hi-MOD Carbon, SPEED SAVE, PF30A, 1.5 Si Head Tube, 27.5" (S), 29" (M-X)
FORK	Lefty 2.0 Carbon, 100mm, XLR Isolated Damper Technology with XC+ tune and XLoc remote, Offset - 50mm (S), 55mm (M-X)
REAR SHOCK	N/A
RIMS	ENVE Carbon M50, tubeless ready
HUBS	Lefty 60 front, DT Swiss Custom C-36, 36 Point Engagement, 28 hole (Ai Offset dish - Rear)
SPOKES	DT Swiss AeroLite (Ai Offset dish - Rear)
TIRES	Schwalbe Racing Ralph EVO Snakeskin, 29/27.5x2.25", folding, tubeless ready
PEDALS	N/A
CRANK	Cannondale HollowGram Si, Ai, BB30, SpideRing 32T
CRANK OPTION	N/A
BOTTOM BRACKET	Cannondale Alloy PressFit30
CHAIN	SRAM PCX01 Eagle , 12-speed

REAR COGS	SRAM XG1295 Eagle, 10-50, 12-speed
FRONT DERAILLEUR	N/A
REAR DERAILLEUR	SRAM XX1 Eagle, 12-speed
SHIFTERS	SRAM XX1 Eagle, 12-speed
HANDLEBAR	FSA K-Force Carbon, flat, 760mm
GRIPS	Cannondale Locking Grips
STEM	Cannondale C1, 6061 Alloy, 1.5", 31.8, -5 deg.
HEADSET	Cannondale HeadShok Si
BRAKES	SRAM Level Ultimate, 180/160mm, Centerline Rotors
BRAKE LEVERS	SRAM Level Ultimate
SADDLE	Prologo Zero II TiRox Rail
SEATPOST	Cannondale F-Si SAVE Carbon 27.2x400mm
SIZES	S (27.5") M,L,XL (29")
COLOR 1	Berserker Green w/Chrome, Gloss - REP
COLOR 2	N/A
EXTRAS	Tubeless Kit

© CANNONDALE EUROPE 06/2016 WWW.CANNONDALE.COM

C25157M

F-Si Carbon 1

FRAME	F-Si Asymmetric, BallisTec Hi-MOD Carbon, SPEED SAVE, PF30A, 1.5 Si Head Tube, 27.5" (S), 29" (M-X)
FORK	Lefty 2.0 Carbon, 100mm, XLR Isolated Damper Technology with XC+ tune and XLoc remote, Offset - 50mm (S), 55mm (M-X)
REAR SHOCK	N/A
RIMS	Cannondale CZero SL, Superlight Hi-Impact Carbon, Tubeless Ready, 28hole, 23mm ID, Ai Offset Rear
HUBS	CZero Straight Pull, Lefty 60 front, 39-point engagement rear, 28h (Ai Offset dish - Rear)
SPOKES	DT-Swiss Aerolite (Ai Offset dish - Rear)
TIRES	Schwalbe Racing Ralph EVO Snakeskin, 29/27.5x2.25", folding, tubeless ready
PEDALS	N/A
CRANK	Cannondale HollowGram Si, BB30, 32t Ai SpideRing
CRANK OPTION	N/A
BOTTOM BRACKET	Cannondale Alloy PressFit30
CHAIN	Shimano CN-HG601, 11-speed
REAR COGS	Shimano XT, 11-42, 11-speed
FRONT DERAILLEUR	N/A
REAR DERAILLEUR	Shimano XTR Di2, 11-speed
SHIFTERS	Shimano XT Di2, 11-speed
HANDLEBAR	Cannondale CZero flat, Carbon, 760mm
GRIPS	Cannondale Locking Grips
STEM	Cannondale C1, 6061 Alloy, 1.5", 31.8, -5 deg.
HEADSET	Cannondale HeadShok Si
BRAKES	Shimano XT, 160/160mm, Ice Tech Rotors
BRAKE LEVERS	Shimano XT
SADDLE	Prologo Zero II TiRox Rail
SEATPOST	Cannondale F-Si SAVE Carbon 27.2x400mm
SIZES	S (27.5") M,L,XL (29")
COLOR 1	Acid Red w/Jet Black, Gloss - ARD
COLOR 2	N/A
EXTRAS	Tubeless Kit

C25207M

F-Si Carbon 2

FRAME	F-Si Asymmetric, BallisTec Carbon, SPEED SAVE, PF30A, 1.5 Si Head Tube, 27.5" (S), 29" (M-X)
FORK	Lefty 2.0, 100mm, XLR Isolated Damper Technology with XC+ tune and XLoc remote, Offset - 50mm (S), 55mm (M-X)
REAR SHOCK	N/A
RIMS	Cannondale CZero Superlight Hi-Impact Carbon, Tubeless Ready, 28 hole, 23mm ID, tubeless ready (Ai Offset dish - Rear)
HUBS	Lefty 60 front, CZero rear (Ai Offset dish - Rear)
SPOKES	CZero (Ai Offset dish - Rear)
TIRES	Schwalbe Racing Ralph EVO Snakeskin, 29/27.5x2.1", folding, tubeless ready
PEDALS	N/A
CRANK	Cannondale HollowGram Si, Ai, BB30, SpideRing 32T
CRANK OPTION	N/A
BOTTOM BRACKET	Cannondale Alloy PressFit30
CHAIN	Shimano CN-HG601, 11-speed
REAR COGS	Shimano XT, 11-42, 11-speed
FRONT DERAILLEUR	N/A
REAR DERAILLEUR	Shimano XTR, Shadow Plus, 11-speed
SHIFTERS	Shimano XT, 1x11
HANDLEBAR	Cannondale C1 flat, carbon, 760mm
GRIPS	Cannondale Locking Grips
STEM	Cannondale C1, 6061 Alloy, 1.5", 31.8, -5 deg.
HEADSET	Cannondale HeadShok Si
BRAKES	Magura MT-RACE w/ Storm SL Rotors, 180/160mm
BRAKE LEVERS	Magura MT-RACE w/ Carbotecture body, reach adjust, Shiftmix
SADDLE	Prologo Zero II STN Rail
SEATPOST	Cannondale F-Si SAVE 2 Carbon, 27.2x400mm
SIZES	XS,S (27.5") M,L,XL (29")
COLOR 1	Midnight Blue w/ Neon Spring, Turquoise, Gloss - MDN
COLOR 2	Jet Black w/ Hazard Orange, Chrome, Gloss - ORG
EXTRAS	Tubeless Kit

© CANNONDALE EUROPE 06/2016 WWW.CANNONDALE.COM

C25307M

F-Si Carbon 3

FRAME	F-Si Asymmetric, BallisTec Carbon, SPEED SAVE, PF30A, 1.5 Si Head Tube, 27.5" (S), 29" (M-X)
FORK	Lefty 2.0, 100mm, PBR Isolated Damper Technology with XC+ tune and updated controls, Offset - 50mm (S), 55mm (M-X)
REAR SHOCK	N/A
RIMS	Stan's NoTubes ZTR Crest, 23mm inner, Tubeless Ready
HUBS	Lefty 60 front, Custom Formula 1702 rear (Ai Offset dish - Rear)
SPOKES	DT-Swiss Competition (Ai Offset dish - Rear)
TIRES	Schwalbe Racing Ralph EVO Performance, 29/27.5x2.1", tubeless ready
PEDALS	N/A
CRANK	Cannondale Si, Ai, BB30, FSA 26/36 rings
CRANK OPTION	N/A
BOTTOM BRACKET	Cannondale Alloy PressFit30
CHAIN	Shimano CN-HG601, 11-speed
REAR COGS	Shimano SLX , 11-42, 11-speed

FRONT DERAILLEUR	Shimano XT, direct mount
REAR DERAILLEUR	Shimano XT, Shadow Plus, 11-speed
SHIFTERS	Shimano XT, 2x11
HANDLEBAR	Cannondale C2 flat, 2014 double-butted alloy, 700mm
GRIPS	Cannondale Locking Grips
STEM	Cannondale C1, 6061 Alloy, 1.5", 31.8, -5 deg.
HEADSET	Cannondale HeadShok Si
BRAKES	Magura MT-RACE w/ Storm SL Rotors, 180/160mm
BRAKE LEVERS	Magura MT-RACE w/ Carbotecture body, reach adjust, Shiftmix
SADDLE	Prologo Zero II STN Rail
SEATPOST	Cannondale C2, 7075 alloy, 27.2mm x 400mm
SIZES	XS,S (27.5") M,L,XL (29")
COLOR 1	Nearly Black w/ Jet Black and Acid Red, Gloss - NBL
COLOR 2	Neon Spring w/ Jet Black and Cerulean, Gloss - NSP
EXTRAS	N/A

C25407M

F-Si Carbon 4

FRAME	F-Si Asymmetric, BallisTec Carbon, SPEED SAVE, PF30A, 1.5 Si Head Tube, 27.5" (S), 29" (M-X)
FORK	Lefty 2.0, 100mm, PBR Isolated Damper Technology with XC+ tune and updated controls, Offset - 50mm (S), 55mm (M-X)
REAR SHOCK	N/A
RIMS	WTB STP i19 Tubless Ready
HUBS	Lefty 60 front, Formula DC-1422 rear (Ai Offset dish - Rear)
SPOKES	DT Swiss Competition (Ai Offset dish - Rear)
TIRES	Schwalbe Racing Ralph Performance 29/27.5x2.1", tubeless ready
PEDALS	N/A
CRANK	Cannondale Si, Ai, BB30, FSA 26/36 rings
CRANK OPTION	N/A
BOTTOM BRACKET	Cannondale Alloy PressFit30
CHAIN	KMC X11, 11-speed
REAR COGS	SunRace, 11-40, 11-speed

FRONT DERAILLEUR	Shimano SLX, direct mount
REAR DERAILLEUR	Shimano XT, Shadow Plus, 11-speed
SHIFTERS	Shimano SLX , 2x11
HANDLEBAR	Cannondale C3 flat, 6061 double-butted alloy, 700mm
GRIPS	Cannondale Locking Grips
STEM	Cannondale C3, 6061 Alloy, 1.5", 31.8, -5 deg.
HEADSET	Cannondale HeadShok Si
BRAKES	Shimano Deore hydraulic disc, 180/160mm (S-160/160mm)
BRAKE LEVERS	Shimano Deore
SADDLE	Prologo K3
SEATPOST	Cannondale C3, 6061 alloy, 27.2x350mm (XS,S,M) 400mm (L,X)
SIZES	XS,S (27.5") M,L,XL (29")
COLOR 1	Anthracite w/ Jet Black, Matte - ANT
COLOR 2	Jet Black w/ Neon Spring, Gloss - BLK
EXTRAS	N/A

© CANNONDALE EUROPE 06/2016 WWW.CANNONDALE.COM

F-Si ALLOY

UN DNA DA COPPA DEL MONDO PER TUTTI QUANTI.

Un'arma XC con pedigree da coppa del mondo, la F-Si combina una moderna geometria XC con la nostra rinomata struttura del telaio in lega SmartFormed per offrire prestazioni agonistiche mozzafiato a un prezzo più accessibile.

RICAPITOLANDO:

Un rapporto prezzo-prestazioni imbattibile per il moderno XC.

PRINCIPALI ARGOMENTI DI VENDITA:

» L'AGILITÀ XC INCONTRA LA STABILITÀ ALL-MOUNTAIN
I modelli dotati di ***Lefty*** vengono ottengono una geometria dello ***OutFront*** completa, mentre altre sfruttano il rake della forcella più lungo disponibile per bilanciare la stabilità alle alte velocità con l'agilità alle basse velocità.

» TRAZIONE VINCENTE
Una sagomatura vincente dei tubi e un tubo reggisella curvo offrono foderi bassi corti stretti per una rigidità laterale eccezionale e una trazione vincente in gara.

» INCREDIBILMENTE COMODA
La tecnologia a micro-sospensioni SAVE utilizza foderi alti e bassi appiattiti e sagomati di nostra invenzione per garantire una guidabilità sorprendentemente docile.

» RUOTE SU MISURA
La migliore calzata possibile per biker di tutte le stature, la F-Si usa ruote da 27,5" per la taglia small e ruote da 29" per le taglie da medium a x-large.

PROFILO DEL CICLISTA

Aspiring XC racers looking for a bike to take their performance to the next level.

TIPO DI UTILIZZO

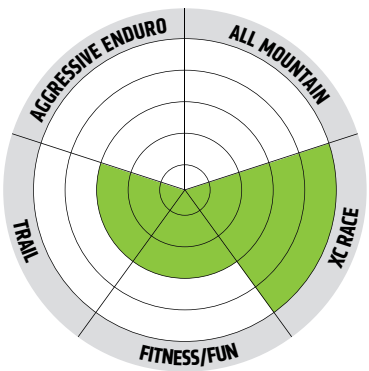

POSIZIONE DEL CICLISTA

XC moderno allo stato puro. Posteriore piatto ribassato con distribuzione centrale del peso.

TECNOLOGIA:

OutFront - Geometria dello sterzo ottimizzata

Struttura in lega SmartFormed

Save Micro-Suspension

Tubo dello sterzo Si da 1,5

GEOMETRIÆ

		XS (27.5")	S (27.5")	M (29")	L (29")	X (29")
A	SEAT TUBE LENGTH (CM/IN)	36.5/14.4	38.5/15.2	43.5/17.1	48.3/19.0	53.3/21.0
B	TOP TUBE HORIZONTAL (CM/IN)	54.7/21.5	57.0/22.4	59.6/23.5	62.3/24.5	64.8/25.5
C	TOP TUBE ACTUAL (CM/IN)	52.6/20.7	54.4/21.4	56.5/22.2	59.0/23.2	61.7/24.3
D	HEAD TUBE ANGLE	68.9°	69.0°	69.7°	69.8°	69.9°
E	SEAT TUBE ANGLE EFFECTIVE	73.4°	73.3°	73.2°	73.1°	73.0°
E	SEAT TUBE ANGLE ACTUAL	71.5°	71.4°	71.3°	71.2°	71.1°
F	STANDOVER (CM/IN)	73.0/28.7	73.7/29.0	77.7/30.6	80.6/31.7	83.7/32.9
G	HEAD TUBE LENGTH (CM/IN)	9.7/3.8	9.7/3.8	9.7/3.8	11.0/4.3	12.2/4.8
H	WHEELBASE (CM/IN)	105.3/41.5	107.4/42.3	110.3/43.4	112.9/44.4	115.2/45.4
I	FRONT CENTER (CM/IN)	63.5/25.0	65.6/25.8	67.6/26.6	70.1/27.6	72.4/28.5
J	CHAIN STAY LENGTH (CM/IN)	42.2/16.6	42.2/16.6	43.5/17.1	★	★
K	BOTTOM BRACKET DROP (CM/IN)	4.5/1.8	4.5/1.8	6.2/2.4	★	★
L	BOTTOM BRACKET HEIGHT (CM/IN)	30.8/12.1	30.8/12.1	31.0/12.2	★	★
M	FORK RAKE (CM/IN)	5.0/2.0	5.0/2.0	5.5/2.2	★	★
N	TRAIL (CM/IN)	8.3/3.3	8.2/3.2	7.9/3.1	7.8/3.1	7.8/3.1
O	STACK (CM/IN)	57.0/22.4	57.0/22.5	60.3/23.7	61.5/24.2	62.8/24.7
P	REACH (CM/IN)	37.7/14.8	39.9/15.7	41.4/16.3	43.6/17.2	45.6/18.0

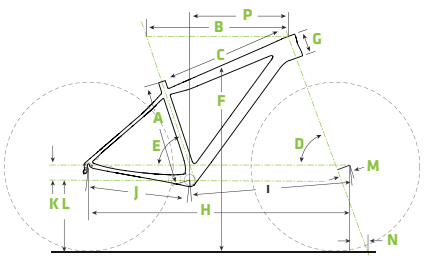

CATEGORIA
XC RACE

RUTO/MISUDO DEL COPERTONEE
27.5 / 29 x 2.1"
(XS, S) / (M, L, X)

CORSA
100mm *ANTERIORE*

C25517M

F-Si 1

FRAME	F-Si, SmartForm C1 Alloy, BB30, Flat Mount Brake, 1.5 Si headtube, S (27.5) M-XL (29)
FORK	Lefty 2.0, 100mm, PBR Isolated Damper Technology with XC+ tune and updated controls, Offset - 50mm (S), 55mm (M-X)
REAR SHOCK	N/A
RIMS	Stan's ZTR Rapid, 32 hole, tubeless ready
HUBS	Lefty 60 front, Formula DC-1422 rear
SPOKES	Stainless Steel, 15g
TIRES	Schwalbe Racing Ralph Performance 29/27.5x2.1", tubeless ready
PEDALS	N/A
CRANK	Cannondale Si, BB30, SpideRing 32T
CRANK OPTION	N/A
BOTTOM BRACKET	Cannondale BB30
CHAIN	Shimano CN-HG601, 11-speed
REAR COGS	SunRace, 11-42, 11-speed

FRONT DERAILLEUR	N/A
REAR DERAILLEUR	Shimano XT, 11-speed
SHIFTERS	Shimano SLX , 11-speed
HANDLEBAR	Cannondale C3 flat, 6061 double-butted alloy, 700mm
GRIPS	Cannondale Locking Grips
STEM	Cannondale C3, 6061 Alloy, 1.5", 31.8, -5 deg.
HEADSET	Cannondale HeadShok Si
BRAKES	Shimano Deore hydraulic disc, 180/160mm (S-160/160mm)
BRAKE LEVERS	Shimano Deore
SADDLE	Cannondale Stage 3
SEATPOST	Cannondale C3, 6061 alloy, 27.2x350mm (S,M) 400mm (L,X)
SIZES	S (27.5") M,L,XL (29")
COLOR 1	Jet Black w/ Berzerker Green, Matte - BBQ
COLOR 2	N/A
EXTRAS	N/A

C25527M

F-Si 2

FRAME	F-Si, SmartForm C1 Alloy, BB30, Flat Mount Brake, 1.5 Si headtube, S (27.5) M-XL (29)
FORK	RockShox Reba RL, 29"/27.5", 100mm, tapered steerer, 15mm Maxle, OneLoc remote lockout, 51mm offset
REAR SHOCK	N/A
RIMS	Stan's ZTR Rapid, 32 hole, tubeless ready
HUBS	Formula DC51 front, DC-22 rear
SPOKES	Stainless Steel, 15g
TIRES	Schwalbe Racing Ralph Performance 29/27.5 x 2.1", tubeless ready
PEDALS	N/A
CRANK	FSA Comet MegaExo, 36/26, 11-speed
CRANK OPTION	N/A
BOTTOM BRACKET	FSA MegaExo
CHAIN	KMC X11, 11-speed
REAR COGS	SunRace, 11-40, 11-speed

FRONT DERAILLEUR	Shimano SLX
REAR DERAILLEUR	Shimano XT, 11-speed
SHIFTERS	Shimano SLX , 2x11
HANDLEBAR	Cannondale C3 flat, 6061 double-butted alloy, 700mm
GRIPS	Cannondale Locking Grips
STEM	Cannondale C3, 6061 Alloy, 1-1/8", 31.8, -5 deg.
HEADSET	Tange 1.5 for Tapered Steer tubes
BRAKES	Shimano Deore hydraulic disc, 180/160mm (S-160/160mm)
BRAKE LEVERS	Shimano Deore
SADDLE	Cannondale Stage 3
SEATPOST	Cannondale C3, 6061 alloy, 27.2x350mm (S,M) 400mm (L,X)
SIZES	S (27.5") M,L,XL (29")
COLOR 1	Matte Jet Black w/ Gloss Hazard Orange - ORG
COLOR 2	N/A
EXTRAS	N/A

© CANNONDALE EUROPE 06/2016 WWW.CANNONDALE.COM

C25537M

F-Si 3

FRAME	F-Si, SmartForm C1 Alloy, BB30, Flat Mount Brake, 1.5 Si headtube, S (27.5) M-XL (29)
FORK	RockShox Recon Gold RL, 100mm, 1-1/8" steerer, 15mm Maxle,Oneloc remote lockout, 51mm offset
REAR SHOCK	N/A
RIMS	Cannondale DC 3.0, double wall, 32 hole
HUBS	Formula DC51 front, DC-22 rear
SPOKES	Stainless Steel, 15g
TIRES	Schwalbe Rapid Rob Performance 29/27.5 x 2.1", tubeless ready
PEDALS	N/A
CRANK	FSA Comet MegaExo, 36/26, 11-speed
CRANK OPTION	N/A
BOTTOM BRACKET	FSA MegaExo
CHAIN	KMC X11 11-speed
REAR COGS	SunRace, 11-40, 11-speed

FRONT DERAILLEUR	Shimano SLX
REAR DERAILLEUR	Shimano XT, 11-speed
SHIFTERS	Shimano SLX , 2x11
HANDLEBAR	Cannondale C3 flat, 6061 double-butted alloy, 700mm
GRIPS	Cannondale Locking Grips
STEM	Cannondale C3, 6061 Alloy, 1-1/8", 31.8, -5 deg.
HEADSET	Tange 1.5 for Tapered Steer tubes
BRAKES	Shimano hydraulic disc, 180/160mm (S-160/160mm)
BRAKE LEVERS	Shimano M445
SADDLE	Cannondale Stage 3
SEATPOST	Cannondale C3, 6061 alloy, 27.2x350mm (S,M) 400mm (L,X)
SIZES	S (27.5") M,L,XL (29")
COLOR 1	Matte Jet Black w/ Gloss Ultra Blue - BLU
COLOR 2	N/A
EXTRAS	N/A

© CANNONDALE EUROPE 06/2016 WWW.CANNONDALE.COM